

BB  
BN

## Adhesive base mounts for cable ties

4 ways - nylon white (BB) / black (BN)

### APPLICATIONS

- Flat surface anchoring of FB and FN cable ties
- Also suitable for outdoor applications (FN series)

### FEATURES

- Nylon (PA 6.6)
- Carbon black additivated (BN series)



**BB**  
white

**BN**  
black

dimensions (mm)	diametro di legatura min-max (mm)	larghezza fascetta (mm)	resistenza a trazione (N) *	pkg. (pcs)	min./mult. ord. (cf)	ref./ item	ref./ item
19 × 19	2 - 13	4	10	100	15	<b>BB19194</b>	<b>BN19194</b>
27 × 27	3 - 20	6	16	100	15	<b>BB27276</b>	<b>BN27276</b>

\* 1 kg ≈ 10 N

Compliance **EN 62275**

Self-extinguishing (UL 94) V2

Operating temperature range **-40 °C / +85 °C**



CE Marking



Directive EU 2015/863 (RoHS 3) Compliant



Halogen free

FBT

## Nylon cable ties with marking tab


white

### APPLICATIONS

- Cabling, fixing and identification of cables, flexible hoses and pipes

### FEATURES

- Identification tag 25 × 8 mm with writable surface
- Nylon (PA) 6.6
- Colour: white

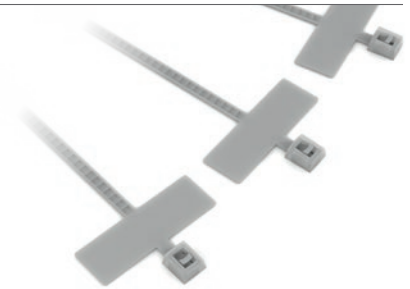

ref.	item	dimensions (mm)	bundle diameter min-max (mm)	tensile strength (N) *	pack. (pcs)	min./mult. ord. (pk)
<b>FBT10025</b>	FBT10025	100 × 2,5	3 - 20	80	100	150

\* 1 kg ≈ 10 N

Self-extinguishing (UL 94) V2

Operating temperature range **-40 °C / +85 °C**



CE Marking



Directive EU 2015/863 (RoHS 3) Compliant



Halogen free