

BB
BN

Adhesive base mounts for cable ties

4 ways - nylon white (BB) / black (BN)

APPLICATIONS

- Flat surface anchoring of FB and FN cable ties
- Also suitable for outdoor applications (FN series)

FEATURES

- Nylon (PA 6.6)
- Carbon black additivated (BN series)



BB
white

BN
black

dimensions (mm)	diametro di legatura min-max (mm)	larghezza fascetta (mm)	resistenza a trazione (N) *	pkg. (pcs)	min./mult. ord. (cf)	ref./ item	ref./ item
19 × 19	2 – 13	4	10	100	15	BB19194	BN19194
27 × 27	3 – 20	6	16	100	15	BB27276	BN27276

* 1 kg ≈ 10 N

Compliance **EN 62275**

Self-extinguishing (UL 94) V2

Operating temperature range **-40 °C / +85 °C**



CE Marking



Directive EU 2015/863 (RoHS 3) Compliant



Halogen free

FBT

Nylon cable ties with marking tab


white

APPLICATIONS

- Cabling, fixing and identification of cables, flexible hoses and pipes

FEATURES

- Identification tag 25 × 8 mm with writable surface
- Nylon (PA) 6.6
- Colour: white

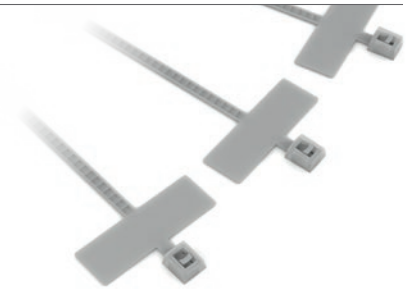

ref.	item	dimensions (mm)	bundle diameter min-max (mm)	tensile strength (N) *	pack. (pcs)	min./mult. ord. (pk)
FBT10025	FBT10025	100 × 2,5	3 - 20	80	100	150

* 1 kg ≈ 10 N

Self-extinguishing (UL 94) V2

Operating temperature range **-40 °C / +85 °C**



CE Marking



Directive EU 2015/863 (RoHS 3) Compliant



Halogen free

APPLICATIONS

- Fixing of plastic or metal rigid cable duct pipes

FEATURES

- Nylon (PA) 6.6
- Grey RAL 7035
- Fixing slot hole with plugs



ref.	item	dimensions (mm)	pipe diameter min-max (mm)	tensile strength (N) *	pack. (pcs)	min./mult. ord. (pk)
FGS16575	FGS16575	170 × 7,0	12 - 35	360	100	20
FGS28575	FGS28575	285 × 7,5	30 - 63	530	100	20

* 1 kg ≈ 10 N

Compliance **EN 62275**

Self-extinguishing (UL 94)
V2

Operating temperature range
-40 °C / +85 °C



CE Marking



Directive EU 2015/863
(RoHS 3) Compliant



Halogen free



TAKE IT fast

KT1074

FGS saddle mount ties
TX 6 wall plugs

100 pcs

ref.	kit contents	min./mult. ord. (pk)
KT1074	FGS16575 - 100 pcs Saddle mount ties 170 × 7.0 mm TX 6 - 100 pz Nylon wall plugs 6 × 30 mm with screw 4,5 × 40 mm	20/5

