

DATA COLLECTION FORM

Medium Voltage Joints

Fill in the form and send to
etelecrisponde@etelec.it



JOINTS

* MANDATORY FIELDS


Applicant info

Surname *	Name
Company *	City *
Email*	Tel.*
Offer Reference Number	Date

Project Data (cable carachteristics)


Cable type*

Configuration	<input type="checkbox"/> Single-core	<input type="checkbox"/> Triplex	<input type="checkbox"/> Three-core
Rated Voltage*	<input type="checkbox"/> 1,8/3 (3,6)	<input type="checkbox"/> 3,6/6 (7,2)	<input type="checkbox"/> 6/10 (12)
U0/U (Um) [kV]*	<input type="checkbox"/> 8,7/15 (17,5)	<input type="checkbox"/> 12/20 (24)	<input type="checkbox"/> 18/30 (36)
Cross-section* [mm2]	<input type="checkbox"/> 3,8/6,6 (7,2)	<input type="checkbox"/> 6,35/11(12)	<input type="checkbox"/> 12,7/20 (24)
Screen	<input type="checkbox"/> Wire	<input type="checkbox"/> Tape	<input type="checkbox"/> Aluminium Tube
Armour	<input type="checkbox"/> Yes	<input type="checkbox"/> No	
Installation*	<input type="checkbox"/> Buried	<input type="checkbox"/> Submersible	<input type="checkbox"/> Air

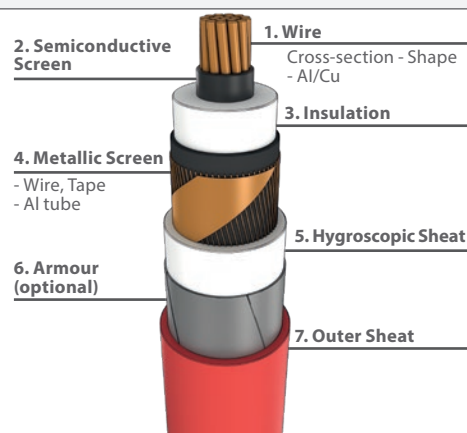

Technology:

☐ Heat-Shrink

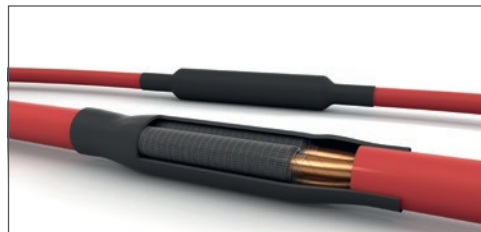

*Multisection connector with fracture head bolts available separately.

☐ Cold-Shrink



*Including multi-section connector with fracture head bolts.

ENEL-Approved Joint:

ENEL Reference:

Connector Type:

☐ Range-Taking Connectors with shear head bolts



☐ Single section compression Connectors

